

The C-300 is the ideal size for well servicing and workovers in shallow to medium depth rages; ease of maintenance and accessibility of components mean lasting value for your investment.

DRAW WORKS

38" x 10" MAIN DRUM

MAIN BARREL DIMENSIONS:	18" DIAMETER X 38" LONG
LINE SIZE:	1" (OTHERS OPTIONAL)
DRUM CLUTCH:	OUTBOARD FULL AIR 2 PLATE 24"
DRAW WORKS DRUM SHAFT:	6-1/2" DIAMETER
SPEEDS:	5 FORWARD AND 1 REVERSE
DRUM DRIVE CHAIN:	ASA 140 (1-3/4") SINGLE
BRAKE RIM SIZE:	38" DIAMETER X 10" WIDE
BRAKE COOLING:	WATER SPRAY
BRAKE ASSIST:	SINGLE DISK
ASSIST COOLING	AIR

38" X 8" SAND DRUM

SAND LINE DRUM DIMENSIONS:	12-3/4" DIAMETER X 40" LONG
LINE SIZE:	9/16″
DRUM CLUTCH:	OUTBOARD FULL AIR SINGLE PLATE 24"
DRAW WORKS DRUM SHAFT:	5-3/4" DIAMETER
CAPACITY:	14,500" OF 9/16"
DRUM DRIVE CHAIN:	ASA 140 (1-3/4") SINGLE
BRAKE RIM SIZE:	38" DIAMETER X 8" WIDE
BRAKE COOLING:	WATER SPRAY

CARRIER

AXLES:	4
CAB:	SINGLE MAN
FRONT AXLE RATING:	22,000 LBS. EACH
REAR AXLE RATING:	26,000 LBS. EACH

POWER PACKAGE

ENGINE:	TIER 4 DIESEL
VERSION:	6 CYLINDER
DISPLACEMENT:	14.0 LITER
BORE AND STROKE:	5.1" x 6.3"
RATED POWER OUTPUT:	325 H.P.
TRASNSMISSION:	ALISON 5620 AUTOMATIC
SPEEDS:	6 FORWARD 1 REVERSE
GEAR BOX:	HEAVY DUTY 580 H.P. RATING
RATIO:	2.46 : 1


DERRICK

HEIGHT	71′
NUMBER OF LINES	4
CAPACITY	
4 LINES	150,000 LBS.
LINE SIZE	
DRILL LINE	1″
SAND LINE	9/16″
TUBING BOARD HEIGHT	27'
ROD BASKET HEIGHT	53'







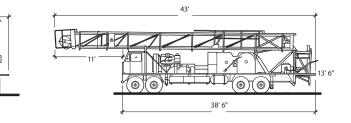



MANUFACTURERS OF THE CAMERON RIG

13′6